

A complete mounting solution for the Hitachi projector and whiteboard.

SMS Projector Short Throw Wall Motorized

The new SMS Projector mounting stand enables the easy integration of Hitachi Interactive whiteboards (FX Series and DuoBoard) for use with ultra short throw Hitachi projectors.



Simple to use – a fixed bracket with electrical lift

This bracket is secured to the wall but can still be rapidly adapted to the heights and requirements of different users.

Ultimate flexibility

The SMS projector stand is designed to be used with the Hitachi FX Series or FX Duo boards 60" or 77".

Flexible height and effortless to use

A complete solution – the main column can be electrically raised and lowered, enabling it to be simply adjusted from one class or meeting to another, making it ideal for use by small children and adults alike.

A solution ideally suited for the Hitachi interactive whiteboard and the ultra short throw Hitachi projector.


Featuring unique Hitachi optical technology, the CP-A100/ED-A100/ED-A100 has an ultra short throw capability delivering a 60" projection and 42cm. This allows the projector to be sited very close to the screen eliminating shadowing effects.

Once installed, this system provides the security of a fixed system with the flexibility of powered adjustable height.

A fixed installation solution that can be easily adapted to the heights of different users!

HITACHI
Inspire the Next

SMS Projector Short Throw Wall Motorized Hitachi

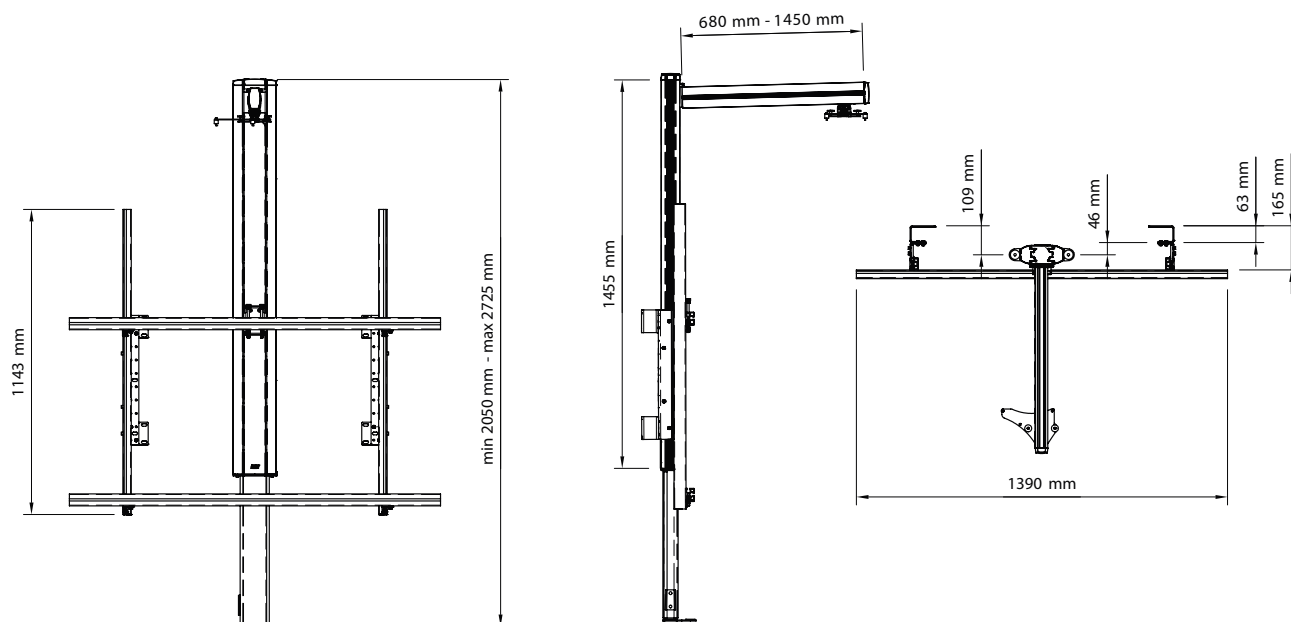

Product Description

Standard package SMS Projector Short Throw Wall

Model Number

AE019005-PO	SMS Projector ShortThrow Wall Motorized Hitachi Please quote when ordering for the UK
AE019006-PO	SMS Projector ShortThrow Wall Motorized Hitachi Please quote for orders outside the UK

Items included

SMS X Motor Single	White
SMS X Pillar 1455 W/S	
ShortThrow Wall Connection	Parts Serie 2
SMS Proj ShortThrow 680 mm	Alu pillar middle Part 2
ShortThrow Board Holder Serie2	Connection/SB,TB,Hitachi FXDuo
SMS Short Throw Slide	Hitachi A100/A110
SMS Power Cord UK/EU	

Technical specifications

Maximum load for projector column	12 kg
Maximum load for main column	40 kg
Tilt of projector slide	Tilt of projector slide: $\pm 15^\circ$
Weight (including packaging)	42.3 kg
Weight (excluding packaging)	39 kg (approximately)

Projector can be suspended at a freely chosen position anywhere on the projector column.
Cables are simply and discretely hidden within both of the profiled columns.
We reserve the right to introduce changes in the product specifications.

Further information:

SMS – Smart Media Solutions AB
Hastholmsvagen 32, 5th floor
SE- 131 30 Nacka
Sweden
Tel: + 46 (0) 8 448 26 60

Hitachi Software Engineering (UK) Limited
Interactive Media Solutions Division
Tel: +44 (0)207 246 6868

Hitachi Software Engineering France S.A.S
Interactive Media Solutions Division
Tel: +33 (0)153 827 600

Hitachi Software Engineering Europe AG
Interactive Media Solutions Division
Tel: +49 (0)30 8877 2600

www.smartmediasolutions.se

HITACHI
Inspire the Next